

10/531845 531,845

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number  
**WO 2004/036209 A1**

(51) International Patent Classification<sup>7</sup>: G01N 33/22,  
25/20, G01F 1/68

(21) International Application Number:  
PCT/EP2003/011565

(22) International Filing Date: 17 October 2003 (17.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02023415.9 18 October 2002 (18.10.2002) EP

(71) Applicant (for all designated States except US): EMER-  
SON ELECTRIC CO. [US/US]; P.O. Box 4100, 8000  
West Florissant Avenue, St. Louis, MO 63136-8506 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BREKELMANS,

Kees, C., J., M., N. [NL/NL]; Middellaan 34, NL-3904  
LH Veenendaal (NL). VAN RIJSWIJK, Jan, Willem, J.,  
W. [NL/NL]; Buurtlaan West 35, NL-3905 JM Veenendaal  
(NL).


(74) Agent: DERKS, Wilbert; Howrey Simon Arnold &  
White, CityPoint, One Ropemaker Street, London EC2Y  
9HS (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR DETERMINING A CHARACTERISTIC VALUE THAT IS REPRESENTATIVE OF  
THE CONDITION OF A GAS

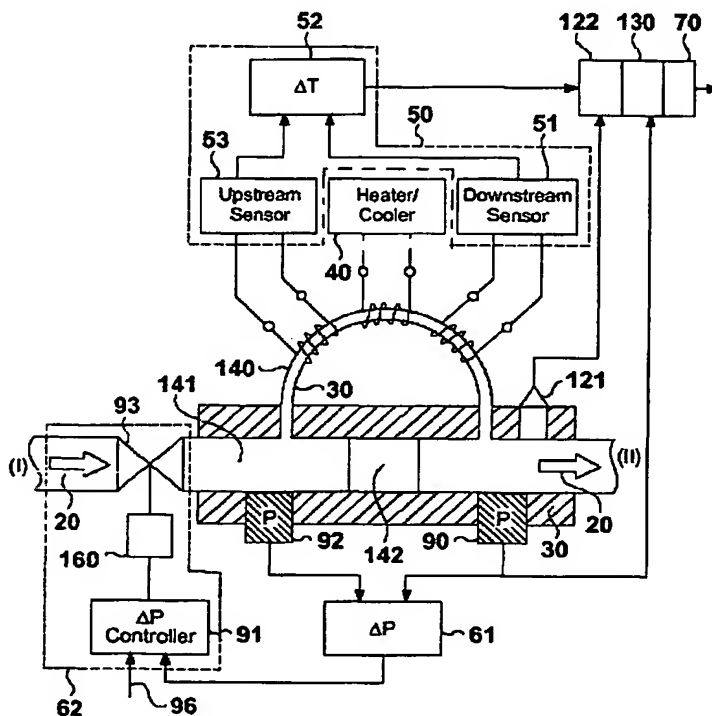

(57) Abstract: The invention relates to a device and methods for the characterisation of a flowing substance, liquid or gas. Particular embodiments of the invention relates to the use of the device for the identification of a flowing substance, for controlling the flow of a fuel or combustion gas to deliver a controlled heat of combustion and for measuring the heat capacity of a gas. Further embodiments of the invention relate to a flow control device for controlling the flow rate of a flowing substance and a method for the combustion of a fuel or combustion gas. The device for the characterisation of a flowing substance comprises: a transport duct on which is mounted a heating or a cooling element; a temperature difference sensor comprising a first temperature measurement cell downstream of the heating or cooling element and means to determine a temperature difference in the flowing substance upstream and downstream of the heating or cooling element; flow control means comprising flow measurement means for measuring a mass flow characteristic and flow correction means for correcting for measured mass flow variations; and evaluation means for evaluating a characterising feature of the flowing substance comprising a function relating temperature differences measured on one or more calibration substances to one or more

characterising features of the flowing substance. The device is relatively simple and cheap and gives a quick but accurate and reliable characterisation of a flowing substance, gas or liquid, that can be used in a flow control device to control the flow rate of unknown substances.

BEST AVAILABLE COPY

WO 2004/036209 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

— before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

METHOD AND DEVICE FOR DETERMINING A CHARACTERISTIC VALUE THAT IS REPRESENTATIVE OF THE CONDITION OF A GAS

5 BACKGROUND OF THE INVENTION

The invention relates to a device and methods for the characterisation of a flowing substance. Particular embodiments of the invention relate to the use of the device for the identification of a flowing substance, for controlling the flow of a fuel or combustion gas to  
10 deliver a controlled heat of combustion and for measuring the heat capacity of a gas. Further embodiments of the invention relate to a flow control device for controlling the flow rate of a flowing substance and a method for the combustion of a fuel or combustion gas.

15 Flow control devices are used to deliver a controlled amount of a flowing substance. This works well in most situations, where the nature of a flowing substance is known and substantially constant in composition over time. However, there are also situations where the nature of the flowing substance is not known and can vary in time. Such a situation occurs for example in natural gas distribution networks where different suppliers pump  
20 natural gas of different origin and/or composition into the network to various customers. The gas supplied to the customers can vary over time in composition and heat of combustion. The flow of the gas changes in an unknown way because of changes in the viscosity, the density or heat capacity of the various different gasses. In such a situation, most flow control devices, like thermal flow controllers, cannot deliver an accurately  
25 controlled mass flow. Because of these unknown changes in the mass flow and heat of combustion, problems can occur like the incomplete combustion of the gas, a too low energy recovery and emission problems.

Another example of such a situation, and a new application of the invention as described  
30 hereafter, is the distribution of fuels for engines. For optimum engine performance and fuel

economy it is desirable that the flow control is able to deal with varying and/or unknown fuel types and compositions. This will become more and more relevant in view of the increasing desire to further optimise fuel economy, to minimise damaging exhaust gasses and in view of the expected increasing diversification in fuels. Hence, there is a desire for a device for the characterisation of the flowing substance.

Direct and accurate measurement of combustion energy is achieved by actually combusting the gas and measuring the heat. Well known devices for the combustionless characterisation of flowing substances, like chromatography or spectrometry, are accurate but have the disadvantages that they are difficult to integrate in-line, that the response time for characterisation of the substance is still too long for accurate control of the flow and that the devices are too expensive and too big for many applications.

DE 41 18 781 describes a device for the characterisation of a gas, in particular for the determination of the Wobbe number and/or heat of combustion of a gas, comprising a pressure control, a lamellar pressure resistance for isothermal expansion of the gas and a mass and a volume flow rate measurement unit. It is described that the gas cools a heating wire with constant over-temperature and the heating power supplied is used as a measure for the mass flow. Apart from that, the volume flow rate is measured. Further, in the device the gas is expanded isothermally over a flow resistance with laminar flow giving rise to a pressure drop. The pressure drop over the flow resistance, the mass and the volume flow measurement unit is measured, which correlates approximately with the density of the gas. The Wobbe number and/or the heat of combustion are evaluated from the measured mass flow, volume flow and pressure drop by substituting the values in an empirical fit-formula, in which the constants are determined by calibration.

EP-A-0469649 describes a calorimeter in which a laminar flow type flow meter for measuring volume flow is put in series with a thermal type flow meter as described above for measuring a mass flow, in which the gas flow is controlled by controlling a constant temperature difference over the sensor and the caloric value of the fuel gas is evaluated from the pressure difference over the volume flow meter. Because this calorimeter requires

two flow meters it is rather complex, expensive and bulky. Further, the accuracy and reliability are insufficient.

FR 2818746 describes a process for the evaluation of a Wobbe parameter wherein a combustion gas is compressed and subsequently expanded and wherein on expansion the flow, pressure and temperature characteristics are measured and wherein a reference gas is similarly measured for determining reference values for accurately evaluating the Wobbe index from an empirical fit formula.

Similarly, in EP-A-0715169 the pressure of a defined volume of gas is raised to a defined pressure level and after that relaxed to the original state, during which relaxation the density and/or the viscosity values are determined, which are input to an empirical fit formula for evaluating the caloric value and/or Wobbe index.

WO 93/08457 and EP 0554095 describe an improved apparatus and methods to derive from multiple measured characteristics of a fuel gas the desired fuel characteristic like for example a Wobbe index.

The problem of the described devices is that they are all relatively complex, expensive and bulky. In particular, it is a disadvantage that the devices are designed only for the evaluation of heat of combustion of a fuel gas. More importantly, the devices are often too inaccurate and lack reproducibility for more demanding applications.

#### SUMMARY OF THE INVENTION

There is a desire for a relatively simple, cheap and compact device and a method for a quick but accurate and reliable characterisation of a flowing substance, gas or liquid, that can be used in a flow control device to control the flow rate of an unknown substance. The problem and object of the invention is to provide such a device and method.

This problem is solved according to the invention by a device for the characterisation of a flowing substance comprising:

- a transport duct on which is mounted a heating or a cooling element,
- 5 — a temperature difference sensor comprising a first temperature measurement cell downstream of the heating or cooling element and means to determine a temperature difference in the flowing substance upstream and downstream of the heating or cooling element,
- flow control means comprising flow measurement means for measuring a mass flow characteristic and flow correction means for correcting for measured mass flow variations, and
- 10 — evaluation means for evaluating a characterising feature of the flowing substance comprising a function relating temperature differences measured on one or more calibration substances to one or more characterising features of the flowing substance.
- 15

The invention also provides a method for the characterisation of a flowing substance that is relatively simple but accurate. This method comprises the steps of:

- 20 — locally heating or cooling the substance flowing through a transport duct, thus creating a temperature difference in the flowing substance upstream and downstream of the heating or cooling element,
- determining the temperature difference,
- 25 — controlling the flow by measuring a mass flow characteristic and correcting the flow for measured mass flow variations, and
- comparing the measured temperature difference with corresponding temperature differences measured on calibration substances for evaluating a characterising feature of the flowing substance.
- 30

It was found that, in the device and method according to the invention, a very accurate and reproducible temperature difference measurement is obtained and that hence a reliable characterisation can be done.

5 It is noted that in many publications the term mass flow is inappropriately used. For example in DE 41 18 781 the heating power of the heating element is proportional with the mass flow but also depends on many other factors and cannot be used directly to characterise and control the mass flow of an unknown substance. In the present application mass flow characteristic means, as described in more detail hereafter, a characteristic  
10 relating directly to the real mass flow of the unknown flowing substance.

### BRIEF DESCRIPTION OF THE DRAWINGS

The following is a description of certain embodiments of the invention given by way of  
15 example only and with reference to the appended drawings, in which:

FIG.1 is a schematic block diagram of one embodiment of the device according to invention including measurement of the pressure difference over the sensor; and

FIG.2 is a schematic block diagram of another embodiment of the device according to  
20 invention including a Coriolis sensor.

### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The flowing substance is forced to flow through a transport duct (30) on which is mounted  
25 a heating or a cooling element (40). The stream before that element is referred to as upstream (indicated I in Figure 1 and 2), the stream after the element is referred to as downstream (indicated II in Figure 1 and 2). In Figure 1 and 2 the flow is forced through the transport duct by a restrictor (142), which can be solid semi-permeable or variable. The heating or cooling element locally heats or cools the substance flowing through a transport  
30 duct with an accurately constant amount of heat creating a temperature difference in the flowing substance upstream and downstream of the heating or cooling element. The

temperature difference sensor (50) comprises a first temperature measurement cell (51) downstream of the heating or cooling element. A single downstream measurement cell can be used if the temperature upstream is known from another source and available to the means (52) to determine a temperature difference in the flowing substance upstream and downstream of the heating or cooling element. For accuracy reasons, a second upstream measurement cell (53) is preferred to measure the actual temperature difference. Although in principle good results can be obtained with a cooling element, for example a Peltier element, a heating element is preferred because a cooling element has the risk that gas can condensate on the element. A heating element is more accurate and less expensive. In applications where the flowing medium is a liquid having a boiling point near the measurement temperature, a risk may exist that on heating a phase transition to gas exists. In such cases a Peltier element is preferred.

Devices comprising a heating element and a temperature difference sensor comprising an upstream and downstream temperature measurement cell are known and used as flow controllers, in particular gas flow controllers. Such gas flow controllers are commercially available from Emerson Process Management, Brooks Instrument Division ®. The measured temperature difference is proportional to the amount of gas flowing through the sensor and can be used to measure and control the flow.

If, in a given temperature difference measurement sensor, the flow rate of the flowing substance is too high or too low, the accuracy of the temperature difference measurement is too low. Therefore, the device according to the invention preferably also comprises a flow rate means for adjusting flow through the transport duct in a detection range of the temperature difference sensor. The flow rate means can be a valve upstream of the sensor (93) or a variable restrictor (142) in or bridged by the transport duct or a combination of a valve and a restrictor.

The device comprises flow control means comprising flow measurement means (61) for measuring a mass flow characteristic and flow correction means (62) for correcting for measured mass flow variations. The inventors have found that this particular flow control



means correcting for real mass flow variations assure an accurate and reproducible temperature difference measurement. The high accuracy and reproducibility assures that the device is capable of identifying substances even if they are very similar and have very close heat capacity.

5

The flow measurement means (61) can determine the mass flow characteristic directly, by special separate mass flow measurement devices as described below in more detail, or indirectly by measuring the pressure difference over the sensor, preferably at known absolute pressure and temperature. It should be noted that sometimes flow meters or  
10 controllers are called mass flow meters/controllers whereas they actually measure/control only volume flow or even just an approximation of the volume flow. The inventors found that using the volume flow control is inadequate for characterising and identification of a flowing medium and gives unreliable results.

15 Flow correction means (62) can be physical or mathematical. Physical flow correction involves a pressure difference control maintaining a substantially constant pressure difference. Mathematical flow correction involves correcting the measured temperature difference for the influence of measured variations in the mass flow.

20 The evaluation means (70), for example a computer, use the temperature difference measurement for evaluating a characterising feature of the flowing substance. The evaluation means comprise a function, for example a data-base, a calibration equation or the test of a condition, relating temperature differences measured in defined standard conditions on one or more calibration substances to one or more characterising features of  
25 the flowing substance. The evaluation means (70) return the characterising feature as output of the device to the user or to another device. Characterisation of the flowing substance is broadly defined. Depending on the particular application of the device characterisation can be a quantitative measurement of the heat capacity of the substance, the qualitative identification of the substance, ancillary known information of the identified substance or  
30 an empirically derived output signal for example for controlling another device.

The function can be a data-base that can be used as a look up table to primarily identify the calibration substance with the best corresponding temperature difference and subsequently return as output one or more characterising features of that calibration substance listed in the database. The database can comprise many different characterising features. It can  
5 comprise substance features, for example the heat capacity, the heat of combustion in case of fuels or natural gasses, but also derived features like the name of the substance, the composition of the substance, set-parameters for controlling another device, an address of the supplier of the substance etc.

- 10 The function can also be a calibration equation relating the measured temperature difference to a characterising feature. The equation comprises constants determined by measuring the temperature difference on a number of different calibration substances and fitting the results to the known characterising features of the calibration substances. This characterisation directly evaluates a property of the substance without identifying the  
15 substance first. The calibration equation can for example relate the measured temperature difference to the specific heat capacity, the Wobbe number of the substance.

The evaluation means can also be used to derive information not directly related to the nature of the substance. In case of changing compositions of known components the  
20 evaluation means can evaluate the composition parameters. In application to control burners or engines the resulting output of the evaluation means can be, instead of the heat of combustion or Wobbe number of the gas, just the optimal control set-parameter of a burner or engine. The function is can than be determined quasi empirical by testing optimum performance of the burner for a number of different gasses.

25 The function can also be the evaluation of a condition, for example comparing the measured temperature difference with a threshold value and returning by the evaluation means a yes or no or an action based on that result.

- 30 The function can also be a combination of the aforementioned functions. For example, the evaluation means can determine the heat of combustion by identifying the substance and

returning the heat of combustion of the substance. In case the evaluation means cannot give an unambiguous positive identification, the calibration function can give an estimate instead.

- 5 The function is defined at known standard measurement conditions in order to get a meaningful evaluation of a characterising feature from a temperature difference measured on an unknown flowing medium. Similarly the calibration substances are measured at standard measurement conditions. Standard measurement conditions are primarily the absolute measurement temperature and pressure. To know the real temperature difference  
10 characteristic for the substances, the signal from the temperature measurement cells (53 and 51) should further be calibrated with known substances for the particular apparatus and chosen pressure difference over the temperature difference sensor. The measurement of unknown substances does not necessarily have to be performed at standard conditions if the temperature and pressure are known or sufficiently constant to allow for mathematical  
15 correction as explained below.

The flowing substance (20) can in principle be any substance capable of flowing through the transport duct of the sensor, for example a gas, a liquid, an emulsion or dispersion. The preferred mode of construction of the device differs depending on whether the flowing  
20 substance is a liquid or a gas.

In a first embodiment of the device, the flow measurement means (61) comprise a pressure measurement cell (90) for measuring a pressure difference over the temperature difference sensor (50) and the flow correction means (62) comprise pressure difference control means  
25 (91) for maintaining a substantially constant pressure difference over the temperature difference sensor, for example by operating a valve upstream (93) or downstream of the temperature difference sensor (see Figure 1). It was found that very accurate and reproducible temperature difference measurements are obtained when the pressure difference over the sensor is maintained substantially constant.

30

A single pressure measurement cell upstream or downstream of the sensor can in principle be used if the pressure at the other end is known from another source such that the pressure difference in the flowing substance upstream and downstream of the heating or cooling element can be determined. For an accurate characterisation of the flow through the sensor, the pressure should be known directly before and after the temperature difference sensor and hence preferably is measured as close as possible to the sensor. Therefore, a second pressure measurement cell measurement cell (92) is preferred to measure the actual pressure difference. The first and second pressure cell can also be integrated in a single pressure difference measurement cell.

In another embodiment the invention the flow measurement means (61) comprise a pressure measurement cell (90) for measuring a pressure difference over the temperature difference sensor (50) and the flow correction means (62) comprise computing means for mathematically correcting the measured temperature difference for a measured pressure difference variation. The mathematical correction by the flow correction means can be a multiplication of the measured temperature difference by the ratio of the measured pressure difference and the standard pressure difference, that is the pressure difference used for measuring the calibration substances. In view of the accuracy of the temperature difference measurement, the mathematical correction is preferably performed on the basis of a calibration function relating the pressure difference over the sensor to the measured temperature difference. Preferably, the absolute temperature and absolute pressure are substantially the same as in the calibration measurements.

In another embodiment the flow measurement means (61) comprise a mass flow sensor (110) measuring the mass flow through the temperature difference sensor (50) and the flow correction means (62) comprise mass flow control means (91) for maintaining a substantially constant mass flow through the temperature difference sensor (50). In an alternative embodiment (shown in Figure 2), the flow correction means (62) comprises computing means (111) for mathematically correcting the measured temperature difference for a measured mass flow variation. The mathematical correction of the mass flow variation with respect to the standard measurement condition is done as described above.

Suitable mass flow sensors (110) are, for example, a coriolis-, an ultrasonic or a sonic nozzle mass flow sensor. Mass flow sensors directly measure mass flow, irrespective of pressure difference variations over the sensor and absolute temperature and pressure differences. A mass flow sensor allows for more accurate control of the mass flow through the sensor and accurate and reproducible temperature difference measurement. This embodiment, using Coriolis mass flow measurement, is particularly suitable for characterising fluids. A further advantage of using the mass flow sensors described above is that they as a result of the same measurement also produce the density of the flowing medium which can be used as additional information by the evaluation means (70) to identify or characterise the flowing medium. The resolution of the identification, that is the chance of uniquely identifying an unknown compound in a set of (similar) compounds, increases by looking in the calibration substances database for the closest match in both the measured temperature difference and the density.

In an open-ended system, changes in atmospheric pressure can cause significant changes in the downstream absolute pressure. Keeping the pressure difference over the sensor constant, as in one embodiment of the invention, does not (necessarily) result in a constant absolute pressure in the sensor. In case of liquids the effect of absolute pressure deviations are small. In case the flowing substance is a gas correction is however preferred. To further improve the reproducibility, the device according to the invention preferably comprises pressure correction means to correct for an absolute pressure variation in the flowing substance.

The correction preferably is physical because that gives more accurate results. The correction means comprise a pressure control for maintaining a substantially constant absolute pressure in the flowing substance, for example by including a valve up- and downstream and a separate control for maintaining a substantially constant absolute pressure. Mathematical correction can be applied here as well. Mathematical correction of the absolute temperature or pressure has the advantage that the device is simpler and cheaper.

Preferably the device also comprises temperature correction means to correct for an absolute temperature variation in the flowing substance. The correction can be physical, for example by a thermo stated housing, or mathematical by temperature correction means comprising temperature measurement means (121) and calculation means (122) for mathematical correction of the measured temperature difference over the sensor (50) for a measured absolute temperature variation.

In a preferred embodiment, the flow measurement means (61) comprise a pressure measurement cell (90) for measuring a pressure difference over the temperature difference sensor (50) and the device further comprises temperature correction means to correct for an absolute temperature variation in the flowing substance and pressure correction means to correct for absolute pressure variations in the flowing substance. The advantage is that this device shows a more accurate and very reproducible temperature difference measurement. A schematic representation of a preferred embodiment is illustrated in Figure 1, the device comprises an upstream (92) and a downstream pressure cell (90) of the pressure difference measurement, wherein the downstream pressure cell is used also to determine absolute downstream pressure for input to the mathematical correction means. The pressure difference is input to physical flow control means (62) comprising a pressure difference controller operating a valve (93) to maintain substantially constant pressure difference over the temperature sensor (50). Further, in Figure 1 a temperature measurement means (121) determines the absolute downstream temperature for input in calculation means (122) for correction of the absolute temperature variations.

In case the flowing substance is a gas, mathematical correction for deviations in absolute pressure and temperature from the standard conditions can in a first approximation be calculated from a general formula based on the ideal gas behaviour of gasses. The corrected temperature difference value ( $\Delta T_{\text{corr}}$ ) is obtained by multiplying the measured temperature difference ( $\Delta T_{\text{meas}}$ ) by a correction factor ( $Q_T$ ) for absolute temperature deviations ( $T - T_{\text{stand}}$ ) and by a correction factor ( $Q_P$ ) for absolute pressure deviations ( $P - P_{\text{stand}}$ ).  $Q_T$  and  $Q_P$  are 1 in case the device has physical correction for absolute temperature or pressure.  $\Delta T_{\text{corr}}$  can be calculated as follows:

$$\Delta T_{\text{corr}} = \Delta T_{\text{meas}} \cdot Q_T \cdot Q_P$$

Wherein:

5

$$Q_T = 1 + (T - T_{\text{stand}})/(273 + T_{\text{stand}}) + 0.00286 * (T - T_{\text{stand}})$$

$$Q_P = P_{\text{stand}}/P \quad (P \text{ in mbar})$$

10 Preferably, the mathematical correction can be done on the basis of a calibration determined by measuring the absolute temperature or pressure dependence of the temperature difference measurement on calibration substances that are similar to the unknown flowing substances expected. This can be done in a meaningful way for well-defined application areas, where the general nature of the flowing substances is known as  
15 for example, in characterising unknown natural gasses. The absolute temperature and pressure dependence can be determined on a set of different natural calibration gasses to establish the range and average of the corrections factors to be applied.

Typically, the transport duct (30) is mounted as a by-pass (140) on a main duct (141) in  
20 which a part of the substance flows from the main duct through the transport duct and sensor and back into the main duct. To create the flow through the by-pass a restrictor element (142) can be integrated in the main duct creating a pressure difference over the temperature difference sensor. The restrictor element can for example be a valve, a duct element with a smaller cross-section area or a porous substance.

25

In a special embodiment the device comprises a switch (160) for switching on and off the flow control means. In the on-mode the pressure controller is used according to the invention to control a constant pressure difference over the sensor for characterisation of the flowing medium. In the off-position, the actual flow rate of the flowing substance  
30 through the transport duct is measured, now using the measured temperature difference and/or using the pressure difference over the sensor as a measure for the mass flow. The

flow rate can also be controlled to a constant set value (96) by the same pressure controller (91) that controls the pressure difference over the sensor by operating valve (93). The advantage is that the device is more versatile because it can perform as flow controller and for characterising a substance.

5

Another preferred embodiment comprises means for intermittently switching the switch to the on- and the off position and means to control the flow rate of the flowing substance in the off-position of the switch at a level determined by a characterising feature of the flowing substance determined in the on-position of the switch. The advantage of this intelligent device is that it can control the flow depending on the characterising feature or nature of the flowing substance. For example, the device in the on-mode identifies the gas, retrieves from the database the heat of combustion of the gas, then determines the flow rate required for delivering a constant heat of combustion according to a given preset level. This device is particularly useful for controlling the flow of a fuel of varying origins and compositions to combustion engines or ovens.

15

The device according to the invention may be used for the identification of a flowing substance, in particular natural gasses, or for controlling the flow of a fuel to deliver a controlled heat of combustion, for example to an engine or to a burner, as an analytical instrument for the determination of the heat capacity of a flowing substance or, for example in environmental protection and control, for the identification of the origin, source or supplier of a flowing substance. An engine comprising a device for controlling fuel has the advantage of being able to optimally combust the fuel even when the composition varies from time to time. The device and method of the invention can be used also to detect air pollution. The database can then be adapted to enable identification of the source and nature of the pollution.

20

25

A method for the characterisation of a flowing substance may comprise the steps of :

- Locally heating or cooling a substance flowing through a transport duct by a heating or cooling element,

30



- Determining a temperature difference in the flowing substance upstream and downstream of the heating or cooling element,
- Controlling mass flow of the flowing substance in the transport duct by measuring a mass flow characteristic and correcting for measured variations in the mass flow characteristic, and
- comparing the measured temperature difference with corresponding temperature differences measured on calibration substances for evaluating a characterising feature of the flowing substance.

10

Detailed explanation of preferences and advantages described above for the device correspondingly apply where appropriate to the methods described above.

15

The method can be carried out in many different embodiments. In one embodiment of the method the measured mass flow characteristic is a pressure difference over the heating- or cooling element and the measured temperature difference is corrected mathematically for a measured pressure difference variation. The advantage of this embodiment is that it is simple and cheap to produce, whilst giving sufficiently accurate temperature difference measurement and characterisation of the flowing substance for many purposes and applications.

20

In another embodiment of the method the measured mass flow characteristic is a pressure difference over the heating- or cooling element and the mass flow is corrected for a measured pressure difference variation to maintain a substantially constant pressure difference over the element. The advantage of this embodiment is that the physical correction gives more accurate and reproducible temperature difference measurements and hence more reliable characterisation of the flowing substance.

25

For more critical applications, where a high reproducibility and accuracy of the temperature difference measurement is required preferably further correction is made for absolute temperature variations and absolute pressure variations in the flowing substance in a way

30

described above. In a preferred embodiment, wherein the measured mass flow characteristic is a pressure difference over the heating- or cooling element, the mass flow is corrected for the measured pressure difference variation to maintain a substantially constant pressure difference over the element and correction is made for absolute temperature variations and absolute pressure variations in the flowing substance.

In a different embodiment of the method the measured mass flow characteristic is the real mass flow rate in the transport duct measured with a mass flow sensor and physically corrected to maintain a substantially constant mass flow rate. The advantage of this embodiment is that the temperature difference measurement is very accurate and reproducible. Suitable mass flow sensors and their applications are described above.

In a more simple and cheaper but still very accurate and reproducible embodiment of the method the measured mass flow characteristic is a real mass flow rate in the transport duct measured with a mass flow sensor and the measured temperature difference is mathematically corrected for a measured mass flow rate variation.

In the method the flowing substance is identified by retrieving from a database the identity of the calibration substance with the best corresponding temperature difference measurement. Once the flowing substance is identified the known properties of that substance can be returned to the user. In an important application of the method the flowing substance is a natural gas and the natural gas is characterised by measuring the temperature difference and retrieving from a database or function, relating temperature difference measurements of different natural gasses with one or more characterising features of said natural gasses, the characterising feature relating to the measured temperature difference measurement. For example, in the method the database or function comprises the heat of combustion of calibration gasses and the temperature difference measurement is used to determine the heat of combustion of the gas. This principle can be used in a method for the combustion of a combustion gas wherein the combustion gas is characterised according to the method of the invention and mixed with an oxygen containing gas in a mixing ratio based on the measured temperature difference.

The combustion gas can be natural gas, bio-gas or industrial waste gasses, but also the vaporised fuel of combustion engines.

- 5 Thus, the invention has been described by reference to certain embodiments. It will be recognised that these embodiments are susceptible to many modifications and alternative forms well known to those of skill in the art. Accordingly, although specific embodiments have been described, these are examples only and are not limiting on the scope of the invention.

## CLAIMS

- 5 1. Device for the characterisation of a flowing substance (20) comprising:
- a transport duct (30) on which is mounted a heating or a cooling element (40),
  - a temperature difference sensor (50) comprising a first temperature measurement cell (51) downstream of the heating or cooling element and means (52) to determine a temperature difference in the flowing substance upstream and downstream of the heating or cooling element,
  - 10 — flow control means comprising flow measurement means (61) for measuring a mass flow characteristic and flow correction means (62) for correcting for measured mass flow variations, and
  - evaluation means (70) for evaluating a characterising feature of the flowing substance comprising a function relating temperature differences measured on one or more calibration substances to one or more characterising features of the flowing substance.
  - 15
- 20
2. Device according to claim 1, characterised in that the function is a data-base or a calibration equation.
- 25 3. Device according to claims 1 to 2 characterised in that the device also comprises a flow rate means for adjusting flow through the transport duct in a detection range of the temperature difference sensor.
- 30 4. Device according to claims 1 to 3 characterised in that the flow measurement means (61) comprise a pressure measurement cell (90) for measuring a pressure difference over the temperature difference sensor (50) and the flow correction means (62)

comprise pressure difference control means (91) for maintaining a substantially constant pressure difference over the temperature difference sensor.

5. Device according to claims 1 to 3 characterised in that the flow measurement means (61) comprise a pressure measurement cell (90) for measuring a pressure difference over the temperature difference sensor (50) and the flow correction means (62) comprise computing means for mathematically correcting the measured temperature difference for a measured pressure difference variation.
- 10 6. Device according to claims 1 to 3 characterised in that the flow measurement means (61) comprise a mass flow sensor (110) measuring the mass flow through the temperature difference sensor (50) and the flow correction means (62) comprise mass flow control means (91) for maintaining a substantially constant mass flow through the temperature difference sensor (50).
- 15 7. Device according to claims 1 to 3 characterised in that the flow measurement means (61) comprise a mass flow sensor (110) measuring the mass flow through the sensor (50) and the flow correction means (62) comprise computing means (111) for mathematically correcting the measured temperature difference for a measured mass
- 20 flow variation.
8. Device according to claims 6 or 7, characterised in that the mass flow sensor (110) is a coriolis-, an ultrasonic or a sonic nozzle mass flow sensor.
- 25 9. Device according to claims 1 to 8, characterised in that the device also comprises temperature correction means to correct for an absolute temperature variation in the flowing substance.
- 30 10. Device according to claim 9, characterised in that the temperature correction means comprise temperature measurement means and calculation means (122) for

mathematical correction of the measured temperature difference over the sensor (50) for a measured absolute temperature variation.

5 11. Device according to claims 1 to 10, characterised in that the device also comprises pressure correction means to correct for an absolute pressure variation in the flowing substance.

10 12. Device according to claim 11, characterised in that the pressure correction means comprises a pressure control for maintaining a substantially constant absolute pressure in the flowing substance.

13. Device according to claim 1 to 5, characterised in that the flow measurement means (61) comprise a pressure measurement cell (90) for measuring a pressure difference over the temperature difference sensor (50) and that the device further comprises  
15 temperature correction means to correct for an absolute temperature variation in the flowing substance and pressure correction means to correct for absolute pressure variations in the flowing substance.

20 14. Device according to claims 1 to 13 characterised in that the transport duct (30) is mounted as a by-pass (140) on a main duct (141) in which a part of the substance flows from the main duct through the transport duct and sensor and back into the main duct.

25 15. Device according to claims 1 to 14, comprising a switch (160) for switching on and off the flow control means, wherein, in the off-position, the device measures a flow rate of the flowing substance through the transport duct.

30 16. Device according to claim 15, comprising means for intermittently switching the switch to the on- and the off position and means to control the flow rate of the flowing substance in the off-position of the switch at a level determined by a characterising feature of the flowing substance determined in the on-position of the switch.

17. Use of a device according to claims 1 to 16 for the identification of a flowing substance.

18. Use of a device according to claims 1 to 16 for controlling the flow of a fuel to deliver a controlled heat of combustion.

5

19. Use of a device according to claims 1 to 16 for the determination of the heat capacity of a flowing substance.

10

20. Use of a device according to claims 1 to 16 for the identification of the source or supplier of a flowing substance.

21. Method for the characterisation of a flowing substance comprising the steps of

— Locally heating or cooling a substance flowing through a transport duct by a heating or cooling element,

15

— Determining a temperature difference in the flowing substance upstream and downstream of the heating or cooling element,

— Controlling mass flow of the flowing substance in the transport duct by measuring a mass flow characteristic and correcting for measured variations in the mass flow characteristic,

20

— comparing the measured temperature difference with corresponding temperature differences measured on one or more calibration substances for evaluating a characterising feature of the flowing substance, and De conclusie is nu op verschillende manieren verruimd tot het eertse idee:

25

22. Method according to claim 21 wherein the measured mass flow characteristic is a pressure difference over the heating- or cooling element and wherein the mass flow is corrected for a measured pressure difference variation to maintain a substantially constant pressure difference over the element.

30

23. Method according to claim 21 wherein the measured mass flow characteristic is a pressure difference over the heating- or cooling element and wherein the measured temperature difference is corrected mathematically for a measured pressure difference variation.

5

24. Method according to claim 21 wherein the measured mass flow characteristic is a real mass flow rate in the transport duct measured with a mass flow sensor and wherein the mass flow rate is corrected for a measured mass flow rate variation to maintain a substantially constant mass flow rate.

10

25. Method according to claim 21 wherein the measured mass flow characteristic is a real mass flow rate in the transport duct measured with a mass flow sensor and wherein the measured temperature difference is mathematically corrected for a measured mass flow rate variation.

15

26. Method according to claim 21 wherein the measured mass flow characteristic is a pressure difference over the heating- or cooling element and wherein the mass flow rate is corrected for the measured pressure difference variation to maintain a substantially constant pressure difference over the element and wherein further correction is made for absolute temperature variations and absolute pressure variations in the flowing substance.

20

27. Method according to claims 21 - 26 wherein the flowing substance is identified by retrieving from a database the identity of the calibration substance with the best corresponding temperature difference measurement.

25

28. Method according to claim 21 to 26 wherein the flowing substance is a natural gas and wherein the natural gas is characterised by measuring the temperature difference and retrieving from a database or function, relating temperature difference measurements of different natural gasses with one or more characterising features of said natural gasses, the characterising feature relating to the measured temperature difference measurement.

30




29. Method according to claim 28 wherein the database or function comprises the heat of combustion of calibration gasses and the temperature difference measurement is used to determine the heat of combustion of the gas.

5


30. Method for the combustion of a combustion gas wherein the combustion gas is characterised according to method claim 29 and mixed with an oxygen containing gas in a mixing ratio based on the measured temperature difference.

10

1/2

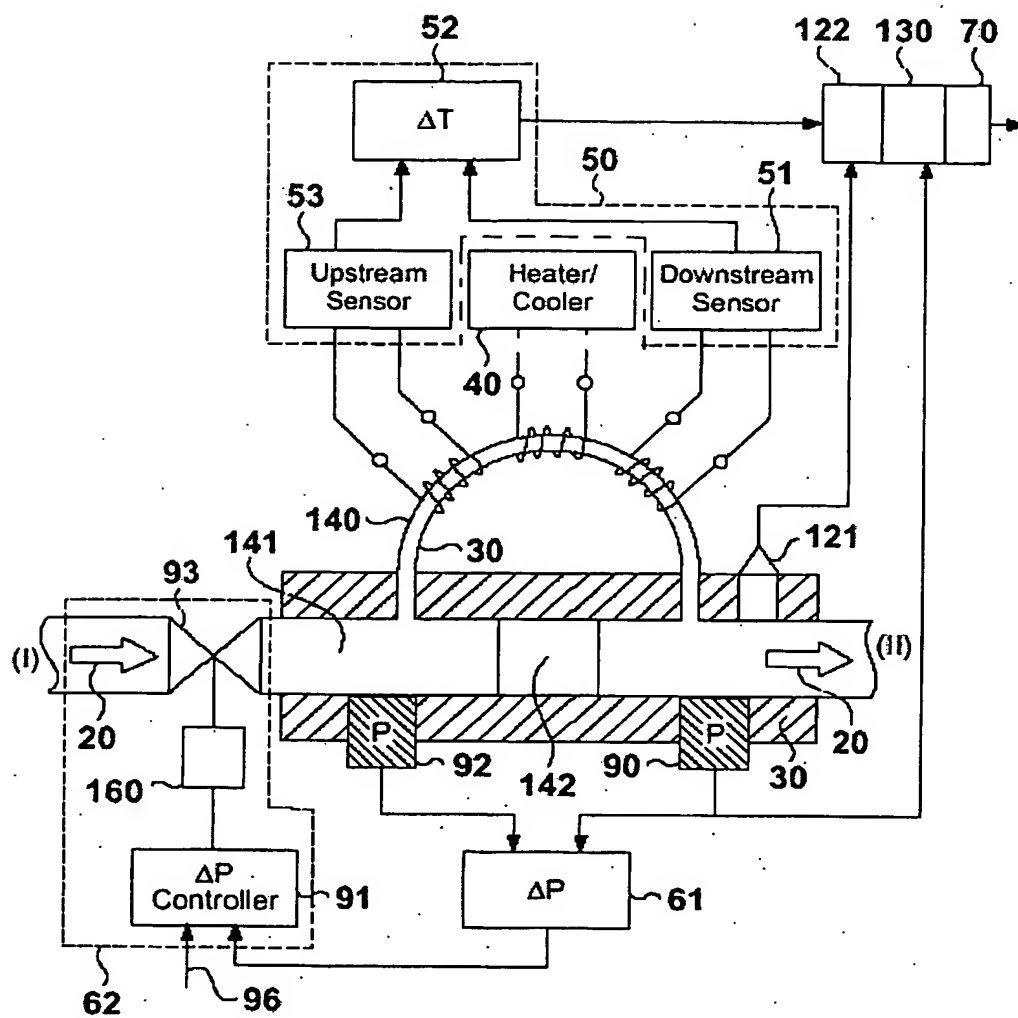**Fig. 1**

212

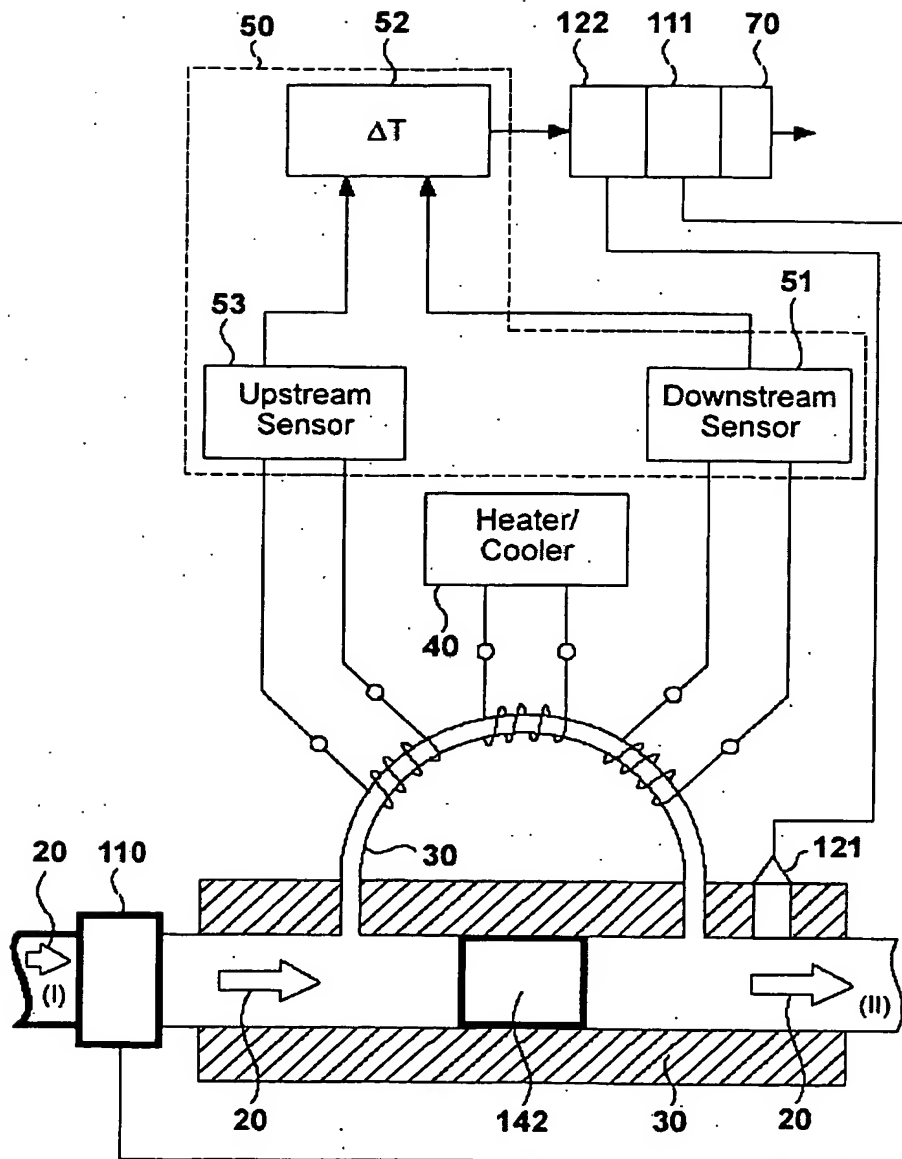

**Fig. 2**

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G01N33/22 G01 20 G01F1/68

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N G01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 469 649 A (OVAL ENG CO LTD ; TOKYO GAS CO LTD (JP)) 5 February 1992 (1992-02-05)	1,3-7, 17,18, 20,21
Y	the whole document	2,8-16, 19,22-30
Y	WO 93 08457 A (NIAGARA MOHAWK POWER CORP) 29 April 1993 (1993-04-29)  page 19, line 20 - line 22 page 35, line 3 - line 18 page 36, line 10 - line 24	2,9-11, 14-16, 19,22-30
Y	FR 2 818 746 A (GAZ DE FRANCE GDF SERVICE NAT) 28 June 2002 (2002-06-28) abstract; figure 1	8
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

25 March 2004

Date of mailing of the international search report

07/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Joyce, D

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 41 18 781 A (RMG MESSTECHNIK GMBH) 10 December 1992 (1992-12-10) cited in the application the whole document ---	12
Y	EP 0 554 095 A (HONEYWELL INC) 4 August 1993 (1993-08-04) page 3, line 49 -page 8, line 16 ---	13
A	EP 0 715 169 A (BRITISH GAS PLC) 5 June 1996 (1996-06-05) column 1 -column 4 ---	1,21
P,X	DE 101 22 039 A (RUHRGAS AG) 14 November 2002 (2002-11-14) the whole document -----	1,21

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0469649	A	05-02-1992	JP 2047928 C	25-04-1996
			JP 4089538 A	23-03-1992
			JP 7081918 B	06-09-1995
			CA 2044197 A1	03-02-1992
			DE 69121815 D1	10-10-1996
			DE 69121815 T2	27-03-1997
			EP 0469649 A2	05-02-1992
			KR 9707816 B1	17-05-1997
			US 5167450 A	01-12-1992
WO 9308457	A	29-04-1993	AT 203819 T	15-08-2001
			AU 3055992 A	21-05-1993
			CA 2121839 A1	29-04-1993
			DE 69231977 D1	06-09-2001
			DE 69231977 T2	04-04-2002
			EP 0612405 A1	31-08-1994
			ES 2161696 T3	16-12-2001
			WO 9308457 A1	29-04-1993
			US 5311447 A	10-05-1994
FR 2818746	A	28-06-2002	FR 2818746 A1	28-06-2002
			CA 2432895 A1	04-07-2002
			EP 1346215 A1	24-09-2003
			WO 02052258 A1	04-07-2002
DE 4118781	A	10-12-1992	DE 4118781 A1	10-12-1992
EP 0554095	A	04-08-1993	EP 0554095 A2	04-08-1993
			US 5486107 A	23-01-1996
EP 0715169	A	05-06-1996	AU 675757 B2	13-02-1997
			AU 3912695 A	27-06-1996
			CA 2163499 A1	03-06-1996
			DE 69523538 D1	06-12-2001
			DE 69523538 T2	08-05-2002
			EP 0715169 A1	05-06-1996
			ES 2167407 T3	16-05-2002
			GB 2296091 A , B	19-06-1996
			HK 1015175 A1	14-06-2002
			NZ 280512 A	24-10-1997
			US 5635626 A	03-06-1997
DE 10122039	A	14-11-2002	DE 10122039 A1	14-11-2002
			WO 02090920 A2	14-11-2002
			EP 1386151 A2	04-02-2004

## PATENT COOPERATION TREATY



PCT

REC'D 01 APR 2005

WIPO

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT  
(PCT Article 36 and Rule 70)

Applicant's or agent's file reference P38438WO/PH/CBJ		<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/PEA/416)	
International application No. PCT/EP 03/11565	International filing date (day/month/year) 17.10.2003	Priority date (day/month/year) 18.10.2002	
International Patent Classification (IPC) or both national classification and IPC G01N33/22			
Applicant EMERSON ELECTRIC CO.			
<p>1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.</p> <p>2. This REPORT consists of a total of 5 sheets, including this cover sheet.</p> <p><input type="checkbox"/> This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).</p> <p>These annexes consist of a total of    sheets.</p>			
<p>3. This report contains indications relating to the following items:</p> <p>I    <input checked="" type="checkbox"/> Basis of the opinion</p> <p>II    <input type="checkbox"/> Priority</p> <p>III    <input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability</p> <p>IV    <input type="checkbox"/> Lack of unity of invention</p> <p>V    <input checked="" type="checkbox"/> Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement</p> <p>VI    <input type="checkbox"/> Certain documents cited</p> <p>VII    <input type="checkbox"/> Certain defects in the international application</p> <p>VIII    <input type="checkbox"/> Certain observations on the international application</p>			
Date of submission of the demand  18.05.2004		Date of completion of this report  04.04.2005	
Name and mailing address of the international preliminary examining authority:  European Patent Office - P.B. 5818 Patentlaan 2 NL-2280 HV Rijswijk - Pays Bas Tel. +31 70 340 - 2040 Tx: 31 651 epo nl Fax: +31 70 340 - 3016		Authorized Officer  Joyce, D  Telephone No. +31 70 340-3093 	

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/EP 03/11565

**I. Basis of the report**

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

**Description, Pages**

1-17 as originally filed

**Claims, Numbers**

1-30 as originally filed

**Drawings, Sheets**

1/2-2/2 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).  
☐ the language of publication of the international application (under Rule 48.3(b)).  
☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.  
☐ filed together with the international application in computer readable form.  
☐ furnished subsequently to this Authority in written form.  
☐ furnished subsequently to this Authority in computer readable form.  
☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.  
☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:  
☐ the claims, Nos.:  
☐ the drawings, sheets:



**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. **PCT/EP 03/11565**

---

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)).

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

6. Additional observations, if necessary:

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

1. Statement

Novelty (N)	Yes: Claims	1-30
	No: Claims	
Inventive step (IS)	Yes: Claims	1-30
	No: Claims	
Industrial applicability (IA)	Yes: Claims	1-30
	No: Claims	

2. Citations and explanations

**see separate sheet**

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/EP 03/11565

**Re Item V:**

*Reference is made to the following documents:*

- D1: EP-A-0 469 649 (OVAL ENG CO LTD ;TOKYO GAS CO LTD (JP)) 5 February 1992 (1992-02-05)
- D2: WO 93/08457 A (NIAGARA MOHAWK POWER CORP) 29 April 1993 (1993-04-29)
- D3: FR-A-2 818 746 (GAZ DE FRANCE GDF SERVICE NAT) 28 June 2002 (2002-06-28)
- D4: DE 41 18 781 A (RMG MESSTECHNIK GMBH) 10 December 1992 (1992-12-10)
- D5: EP-A-0 554 095 (HONEYWELL INC) 4 August 1993 (1993-08-04)
- D6: EP-A-0 715 169 (BRITISH GAS PLC) 5 June 1996 (1996-06-05)
- D7: DE 101 22 039 A (RUHRGAS AG) 14 November 2002 (2002-11-14)

The document D1 is regarded as being the closest prior art to the subject-matter of independent apparatus claim 1 and independent method claim 21 and discloses (the references in parentheses applying to this document):

Device for the characterisation of a flowing substance comprising:

- transport duct (fig: 5 #81) on which is mounted a heating or a cooling element (Fig:5 80(b))
- temperature difference sensor comprising a first temperature measurement cell downstream of the heating or cooling element and means to determine a temperature difference in the flowing substance upstream and downstream of the heating or cooling element (Claim 1 lines 44-48)
- flow control means comprising flow measurement means for measuring a mass flow characteristic (Col 5 line 47-57)
- evaluation means for evaluating a characterising feature of the flowing substance comprising a function relating temperature differences (Col 8 line 48-50).

The subject-matter of claims 1 and 21 therefore differs from this known document D1 in that:

Flow correction means are provided for correcting for measured mass flow variations, and provision of evaluation means, relating temperature differences measured on one or more

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/EP 03/11565

calibration substances to one or more characterising features of the flowing substance.

The subject-matter of the independent claim 1 and 21 is therefore novel, and satisfies the criteria of Article 33(2) PCT.

The problem to be solved by the present invention may therefore be regarded as:

How to provide accurate mass flow measurements during variations in the composition of the flowing substance.

The solution to this problem proposed in claims 1 and 21 of the present application is considered as involving an inventive step (Article 33(3) PCT) for the following reasons: The DT (differential temperature) sensor (50) of the present application is used only to characterise the gas and have separate flow control to provide accurate mass flow control through the transport duct of the sensor, as opposed to D1 where the differential temperature is used to monitor and control the mass flow.

As neither problem nor solution are considered obvious per se, the present independent apparatus claim 1 and corresponding method claim 21 are seen to involve an inventive step in the sense of Article 33(3) PCT.

The industrial applicability of the apparatus of claim 1 and the method of claim 21 is evident, so that therefore all the requirements of Article 33 PCT are met.

Dependent claims 2-20 and 22-30 respectively, define further refinements of the new and inventive idea underlying independent claims 1 and 21, and also meet the requirements of Article 33 PCT for the same reasons as given above.

From the  
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

To:

DERKS, Wilbert  
Howrey Simon Arnold & White  
CityPoint  
One Ropemarker Street  
London EC2Y 9HS  
GRANDE BRETAGNE

NA	JB	MB
29 NOV 2004		
PC	WD	DO
Form.		KR

PCT

WRITTEN OPINION  
(PCT Rule 66)

18-10-2002  
20  
20  
18-11-2005

Date of mailing  
(day/month/year)

26.11.2004

Applicant's or agent's file reference  
10781.0031.00PC00

REPLY DUE

within 3 month(s)  
from the above date of mailing

International application No.  
PCT/EP 03/11565

International filing date (day/month/year)  
17.10.2003

Priority date (day/month/year)  
18.10.2002

International Patent Classification (IPC) or both national classification and IPC  
G01N33/22

ENTERED ON ALECTO

ACTION: Respond to 2nd written opinion

Applicant  
EMERSON ELECTRIC CO.

DEADLINE: 26 Feb. 2005

REMINDER:

1. This written opinion is the **second** drawn up by this International Preliminary Examining Authority. **CHECKED:** \_\_\_\_\_

2. This opinion contains indications relating to the following items:

- I ☒ Basis of the opinion
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

3. The applicant is hereby invited to reply to this opinion.

**When?** See the time limit indicated above. The applicant may, before the expiration of that time limit, request this Authority to grant an extension, see Rule 66.2(d).

**How?** By submitting a written reply, accompanied, where appropriate, by amendments, according to Rule 66.3. For the form and the language of the amendments, see Rules 66.8 and 66.9.

**Also:** For an additional opportunity to submit amendments, see Rule 66.4.  
For the examiner's obligation to consider amendments and/or arguments, see Rule 66.4 bis.  
For an informal communication with the examiner, see Rule 66.6.

If no reply is filed, the international preliminary examination report will be established on the basis of this opinion.

4. The final date by which the international preliminary examination report must be established according to Rule 69.2 is: 18.02.2005

Name and mailing address of the international preliminary examining authority:



European Patent Office - P.B. 5818 Patentlaan 2  
NL-2280 HV Rijswijk - Pays Bas  
Tel. +31 70 340 - 2040 Tx: 31 651 epo nl  
Fax: +31 70 340 - 3016

Authorized Officer

Joyce, D

Formalities officer (Incl. extension of time limits)  
Pozzi, C  
Telephone No. +31 70 340-3260



**I. Basis of the opinion**

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this opinion as "originally filed"*):

**Description, Pages**

1-17 as originally filed

**Claims, Numbers**

1-30 as originally filed

**Drawings, Sheets**

1/2-2/2 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:
- ☐ the drawings, sheets:

5. ☐ This opinion has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)).

6. Additional observations, if necessary:

**V. Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement****1. Statement**

Novelty (N)	Claims	1,3-7,17,18,20,21
Inventive step (IS)	Claims	2,8-16,19,22-30
Industrial applicability (IA)	Claims	1-30

**2. Citations and explanations****see separate sheet**

**WRITTEN OPINION  
SEPARATE SHEET**

International application No. PCT/EP 03/11565

**Re Item V**

**Reasoned statement with regard to novelty, inventive step or industrial applicability;  
citations and explanations supporting such statement**

**Reference is made to the following documents:**

- D1: EP-A-0 469 649 (OVAL ENG CO LTD ;TOKYO GAS CO LTD (JP)) 5 February 1992 (1992-02-05)  
D2: WO 93/08457 A (NIAGARA MOHAWK POWER CORP) 29 April 1993 (1993-04-29)  
D3: FR-A-2 818 746 (GAZ DE FRANCE GDF SERVICE NAT) 28 June 2002 (2002-06-28)  
D4: DE 41 18 781 A (RMG MESSTECHNIK GMBH) 10 December 1992 (1992-12-10)  
D5: EP-A-0 554 095 (HONEYWELL INC) 4 August 1993 (1993-08-04)  
D6: EP-A-0 715 169 (BRITISH GAS PLC) 5 June 1996 (1996-06-05)  
D7: DE 101 22 039 A (RUHRGAS AG) 14 November 2002 (2002-11-14)

**Article 33 PCT:**

The present application does not meet the criteria of Article 33(1) PCT, because the subject-matter of claims 1, 3-7,17,18,20,21 is not new in the sense of Article 33(2) PCT.

The document D1 discloses (the references in parentheses applying to this document):

Device for the characterisation of a flowing substance comprising:

- transport duct (fig: 5 #81) on which is mounted a heating or a cooling element (Fig:5 80(b)) OK
- temperature difference sensor comprising a first temperature measurement cell downstream of the heating or cooling element and means to determine a temperature difference in the flowing substance upstream and downstream of the heating or cooling element (Fig:5 80(c) and 80(d) and Claim 1 lines 44-48) OK
- flow control means comprising flow measurement means for measuring a mass flow characteristic and flow correction means for correcting for measured mass flow variations (Fig:7 #8A and Col 5 line 47-51)
- evaluation means for evaluating a characterising feature of the flowing substance comprising a function relating temperature differences measured on one or more calibration substances to one or more characterising features of the flowing substance (Col

→ that is but element 8A.

**WRITTEN OPINION  
SEPARATE SHEET**

---

International application No. PCT/EP 03/11565

8 line 48-50).

The same reasoning can be applied with corresponding effect mutatis mutandis to the subject-matter of independent claim 21, therefore rendering this claim also lacking novelty.

Dependent claims 2-20 and 22-30 respectively do not contain any features which, in combination with the features of any claim to which they refer, meet the requirements of the PCT in respect of novelty and/or inventive step, see documents D2-D5 and the corresponding passages cited in the search report.



A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G01N33/22 G01N25/20 G01F1/68

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N G01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 469 649 A (OVAL ENG CO LTD ; TOKYO GAS CO LTD (JP)) 5 February 1992 (1992-02-05)	1,3-7, 17,18, 20,21
Y	the whole document	2,8-16, 19,22-30
Y	WO 93 08457 A (NIAGARA MOHAWK POWER CORP) 29 April 1993 (1993-04-29)  page 19, line 20 - line 22 page 35, line 3 - line 18 page 36, line 10 - line 24	2,9-11, 14-16, 19,22-30
Y	FR 2 818 746 A (GAZ DE FRANCE GDF SERVICE NAT) 28 June 2002 (2002-06-28) abstract; figure 1  -/-	8

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

25 March 2004

Date of mailing of the international search report

07/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Joyce, D

## C.(Continuation) DOCUMENTS CONSIDERED RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 41 18 781 A (RMG MESSTECHNIK GMBH) 10 December 1992 (1992-12-10) cited in the application the whole document ----	12
Y	EP 0 554 095 A (HONEYWELL INC) 4 August 1993 (1993-08-04) page 3, line 49 -page 8, line 16 ----	13
A	EP 0 715 169 A (BRITISH GAS PLC) 5 June 1996 (1996-06-05) column 1 -column 4 ----	1,21
P,X	DE 101 22 039 A (RUHRGAS AG) 14 November 2002 (2002-11-14) the whole document -----	1,21

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0469649	A	05-02-1992	JP	2047928 C	25-04-1996
			JP	4089538 A	23-03-1992
			JP	7081918 B	06-09-1995
			CA	2044197 A1	03-02-1992
			DE	69121815 D1	10-10-1996
			DE	69121815 T2	27-03-1997
			EP	0469649 A2	05-02-1992
			KR	9707816 B1	17-05-1997
			US	5167450 A	01-12-1992
WO 9308457	A	29-04-1993	AT	203819 T	15-08-2001
			AU	3055992 A	21-05-1993
			CA	2121839 A1	29-04-1993
			DE	69231977 D1	06-09-2001
			DE	69231977 T2	04-04-2002
			EP	0612405 A1	31-08-1994
			ES	2161696 T3	16-12-2001
			WO	9308457 A1	29-04-1993
			US	5311447 A	10-05-1994
FR 2818746	A	28-06-2002	FR	2818746 A1	28-06-2002
			CA	2432895 A1	04-07-2002
			EP	1346215 A1	24-09-2003
			WO	02052258 A1	04-07-2002
DE 4118781	A	10-12-1992	DE	4118781 A1	10-12-1992
EP 0554095	A	04-08-1993	EP	0554095 A2	04-08-1993
			US	5486107 A	23-01-1996
EP 0715169	A	05-06-1996	AU	675757 B2	13-02-1997
			AU	3912695 A	27-06-1996
			CA	2163499 A1	03-06-1996
			DE	69523538 D1	06-12-2001
			DE	69523538 T2	08-05-2002
			EP	0715169 A1	05-06-1996
			ES	2167407 T3	16-05-2002
			GB	2296091 A , B	19-06-1996
			HK	1015175 A1	14-06-2002
			NZ	280512 A	24-10-1997
			US	5635626 A	03-06-1997
DE 10122039	A	14-11-2002	DE	10122039 A1	14-11-2002
			WO	02090920 A2	14-11-2002
			EP	1386151 A2	04-02-2004